


MUSELED PRO 


LED linear LIGHT SPECIFICATION

LIN3536D

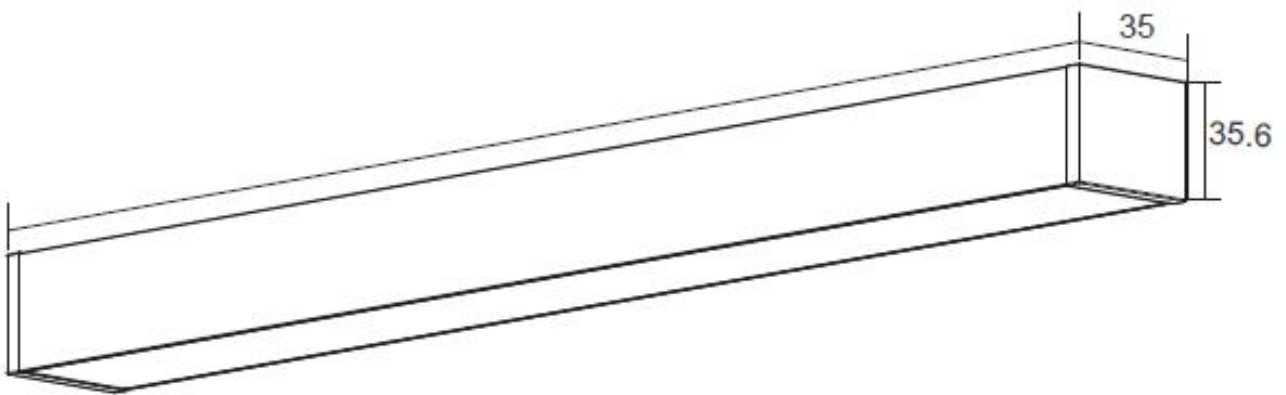

V1.0

Features:

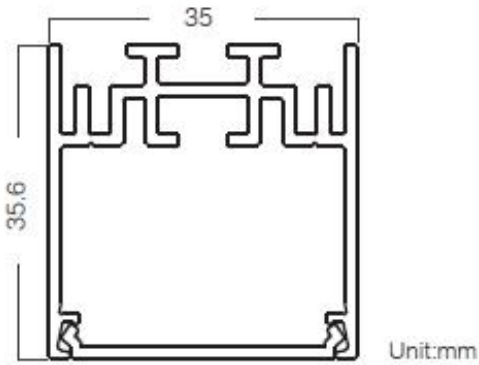

- Elegant 35mm light-emitting surface offers sleek, linear illumination.

- Minimalist design complements modern architectural elements.

-Even lighting via premium diffuser and LED layout.

-Suitable for various applications including kitchens, offices, and retail spaces.

-Cost-effective

Electrical and photometric parameter:


Item No.	Dimension (mm)	Watt (W)	Voltage (VAC)	Ra	Beam Angle	CCT	Lumen (LM)
LIN3536D-15-9WW12	1208 x 35 x 35.6	15W	200-240	>90	105°	3000K	1160lm
LIN3536D-15-9NW12	1208 x 35 x 35.6	15W	200-240	>90	105°	4000K	1200lm
LIN3536D-21-9WW15	1508 x 35 x 35.6	21W	200-240	>90	105°	3000K	1617lm
LIN3536D-21-9NW15	1508 x 35 x 35.6	21W	200-240	>90	105°	4000K	1680lm

Remarks:

1.The value is typical,10% tolerance is allowed.

2. 2700K, 6000K, CCT solution is available.


3.Customizing length is supported.

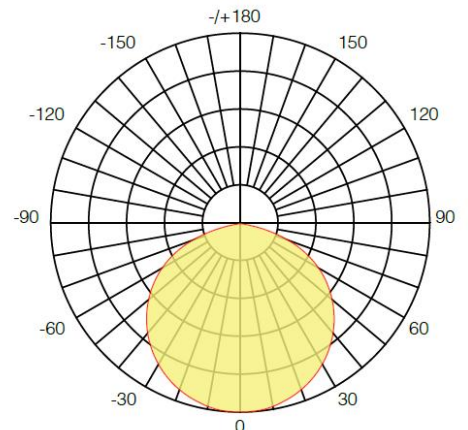

Structure specification :

Light source	Epistar chips	Finish Color	White,Black,Silver
Driver	External, Lifud/Boke	Installation	Pendant/Mounted
Materials	Aluminum	Dim type	Non-dim/0-10V //Dali
Optics	PC diffuser	IP	IP22

Dimension and Installation

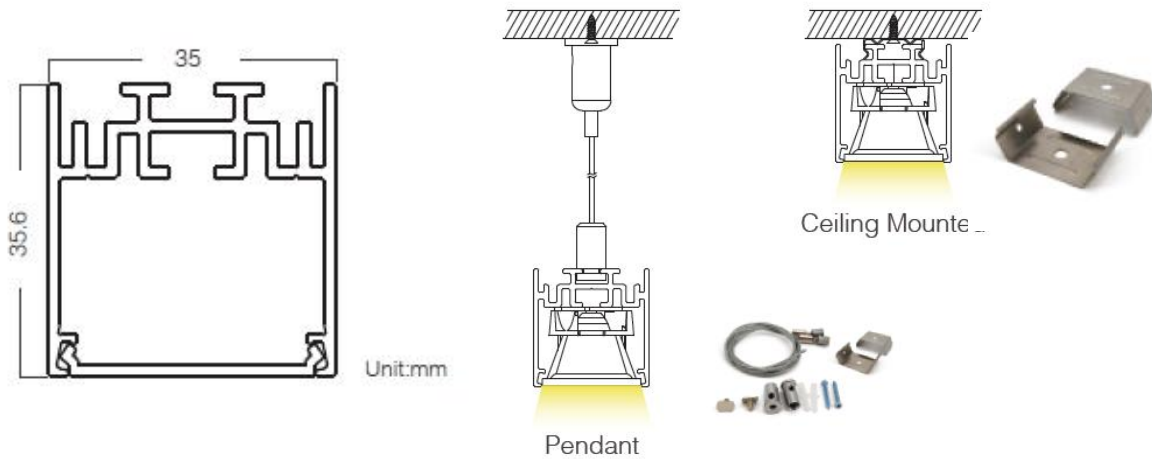

Pakcage:

Item No.	Product Dimension (mm)	Qty per carton	Product N.W/pc (Kg)	N.W/ CTN (Kg)	G.W/ CTN (Kg)	Carton dimension (CM)
LIN3536D-12-9XX12	1208 x 35 x 35.6	9	1.56	14	15.5	126*20*19
LIN3536D-12-9XX15	1508 x 35 x 35.6	9	1.95	17.6	19.5	156*20*19