


MUSELED PRO 

LED linear LIGHT SPECIFICATION LIN3572G


UGR
<19

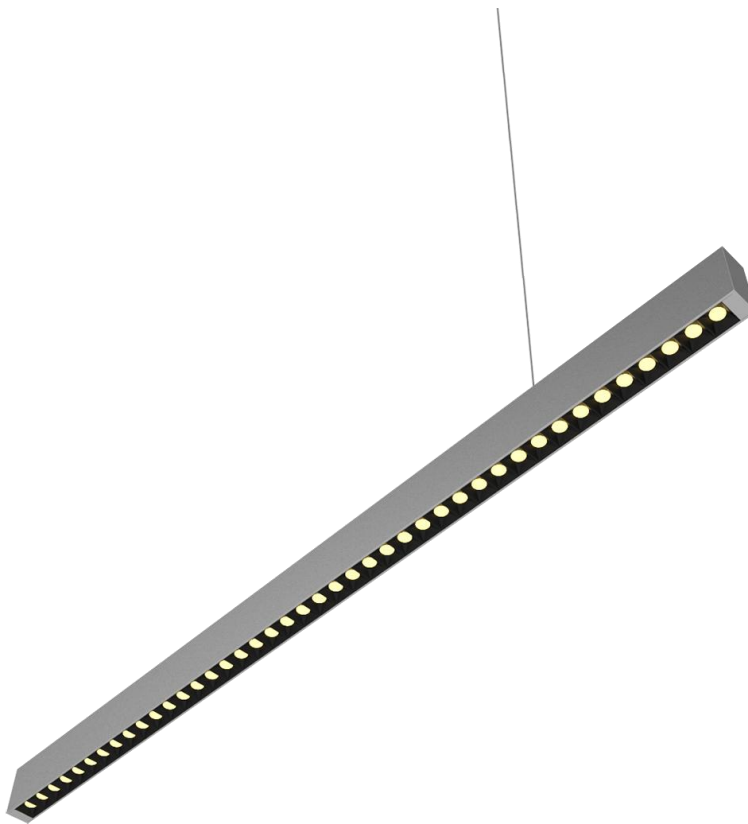



V1.0

LIN3572G

Features:

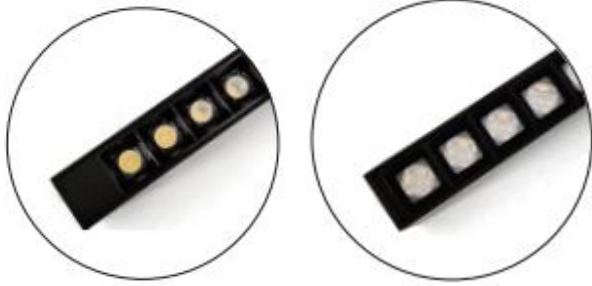

- UGR<19, comfortable lighting.
- Minimalist design complements modern architectural elements.
- Built-in power supply, easy to install
- Multiple anti-glare optic solutions.



Inspiration:

- General or local lighting
- Residential
- Retail
- Restaurant
- office



LIN3572G

Electrical and photometric parameter:

Item No.	Dimension (mm)	Watt (W)	Voltage (VAC)	Ra	Beam Angle	CCT	Lumen (LM)
LIN3572G1-21-93012	1208 x 35 x 73	21W	220-240VAC	>90	50x50°	3000K	1890lm
LIN3572G1-21-94012	1208 x 35 x 73	21W	220-240VAC	>90	50x50°	4000K	1947lm
LIN3572G1-30-93012	1208 x 30 x 73	30W	220-240VAC	>90	50x50°	3000K	2700lm
LIN3572G1-30-94012	1208 x 30 x 73	30W	220-240VAC	>90	50x50°	4000K	2781lm
LIN3572G2-21-93012	1208 x 21 x 73	21W	220-240VAC	>90	50°	3000K	1890lm
LIN3572G2-21-94012	1208 x 21 x 73	21W	220-240VAC	>90	50°	4000K	1947lm
LIN3572G2-30-93012	1208 x 30 x 73	30W	220-240VAC	>90	50°	3000K	2700lm
LIN3572G2-30-94012	1208 x 30 x 73	30W	220-240VAC	>90	50°	4000K	2781lm



Beam Angle :



50x50°



50°

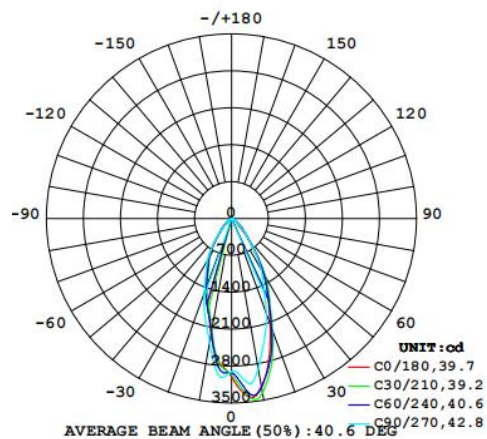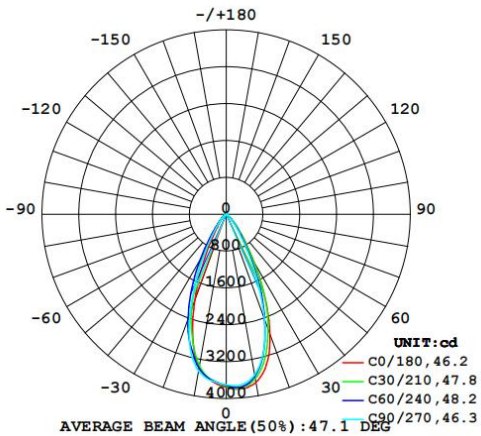


LIN3572G

Structure specification :

Light source	Epistar chips	Finish Color	White,Black,Silver
Driver	Internal, Lifud/Boke	Installation	Pendant/Mounted
Materials	Aluminum	Dim type	Non-dim/0-10V //Dali
Optics	Grating, UGR<19	IP	IP22

Dimension and Installation

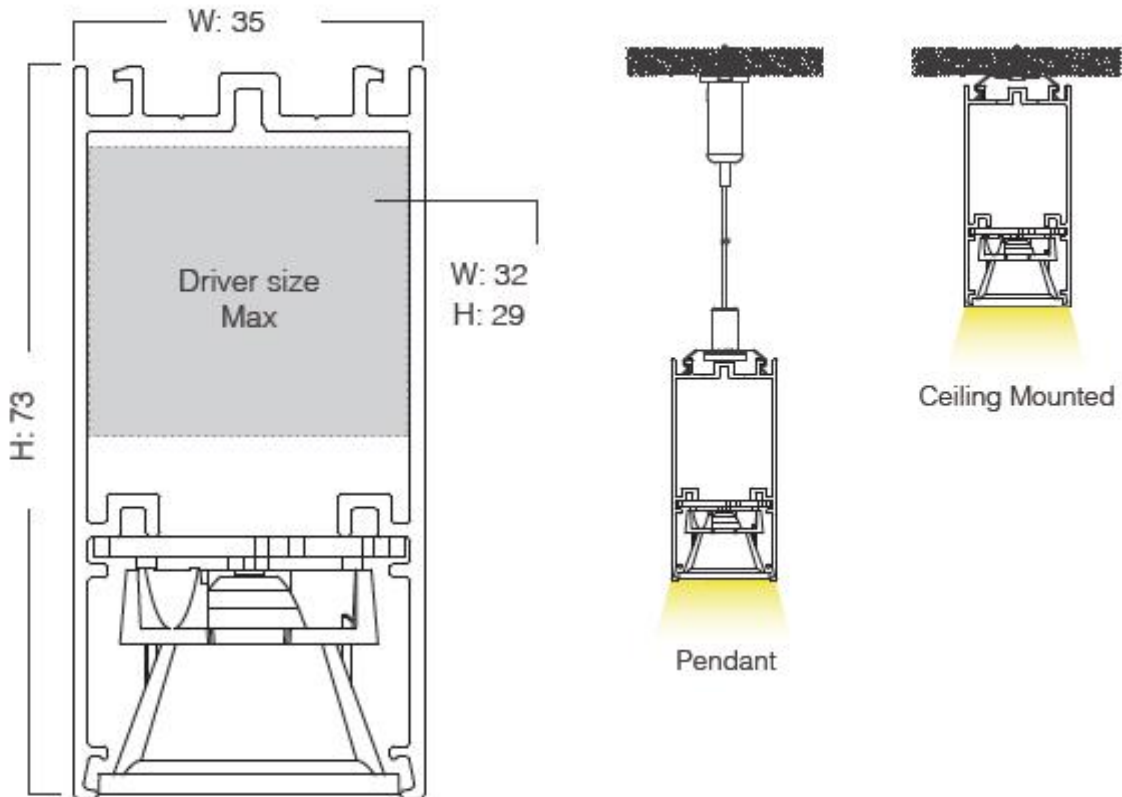

LIN3572G

Accessories



Pendant kit



Ceiling mounted kit

Environment specification :

TEMPERATURE RANGE

Ambient: -20°C to 40°C;

HUMIDITY RANGE

0 to 95% non-condensing humidity

Pakcage:

Item No.	Product Dimension (mm)	Qty per carton	Product N.W/pc (Kg)	N.W/ CTN (Kg)	G.W/ CTN (Kg)	Carton dimension (CM)
LIN3572G X-XX- 9XX12	1208 x 35 x 73	6	1.42	8.5	9.5	127*22*19