

MUSELED PRO 

LED CIRCULAR LIGHT SPECIFICATION


ORA50H



V1.0

ORA50H

Features:

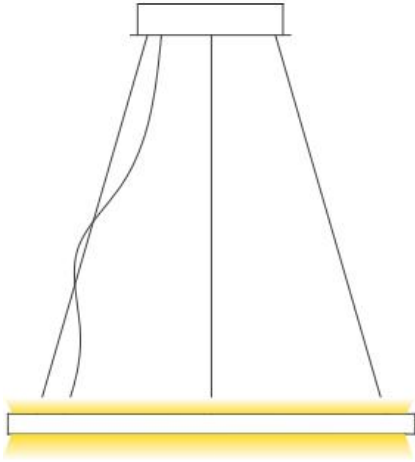

- Modern and fine design,
- Up and down lighting,provides ambient, task, or accent lighting via up and down lighting.
- typical 50mm emitting size,
- Driver is hidden via ceiling canopy kit,
- White,black,Silver color options



Inspiration:



- General or local lighting
- Residential
- Retail
- Restaurant
- Hotel


Electrical and photometric parameter:

| Item No. | Dimension (mm) | Watt (W) | Voltage (VAC) | Ra | Beam Angle | CCT | Lumen (LM) |
|------------------|-------------------|----------|---------------|-----|------------|-------|--------------------------------------|
| ORA50H45-25-9NW | Φ450mmxW50XH75mm | 40W | 220-240 | >80 | 110° | 4000K | UP:20W, 1400lm Down:20W, 1500lm |
| ORA50H60-35-9NW | Φ600mmxW50XH75mm | 54W | 220-240 | >80 | 110° | 4000K | UP: 27W, 1890lm, Down:27W,2025lm, |
| ORA50H90-50-9NW | Φ900mmxW50XH75mm | 80W | 220-240 | >80 | 110° | 4000K | UP: 40W, 2800lm, Down:40W,3000lm, |
| ORA50H120-70-9NW | Φ1200mmxW50XH75mm | 100W | 220-240 | >80 | 110° | 4000K | UP:50W, 3500lm, Down:50W,3750lm, |
| ORA50H150-90-9NW | Φ1500mmxW50XH75mm | 130W | 220-240 | >80 | 110° | 4000K | UP:65W, 4550lm, Down:65W,4875lm, |

Remarks:

- 1.The value is typical,10% tolerance is allowed.
2. 2700K,3000K, 6000K, CCT solution is available.
- 3.Customizing diameter is supported.


Beam Angle :

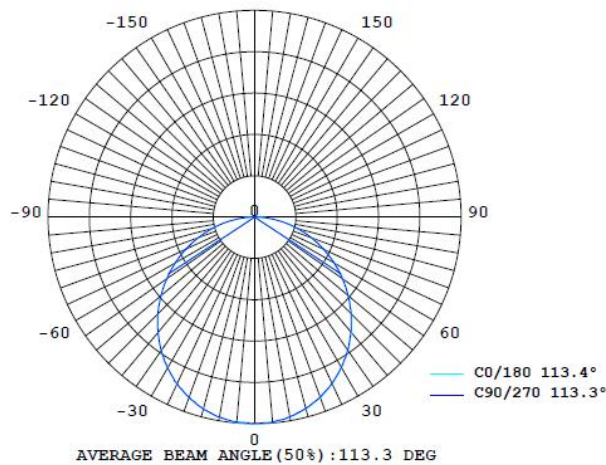

Structure specification :

| | | | |
|--------------|-------------------------|--------------|-------------------------------|
| Light source | Epistar chips | Finish Color | White,Black,Silver |
| Driver | External, Lifud/Boke | Installation | Pendant |
| Materials | Aluminum | Dim type | Non-dim/0-10V /Triac /Dali |
| Optics | PC diffuser | IP | IP22 |

Dimension

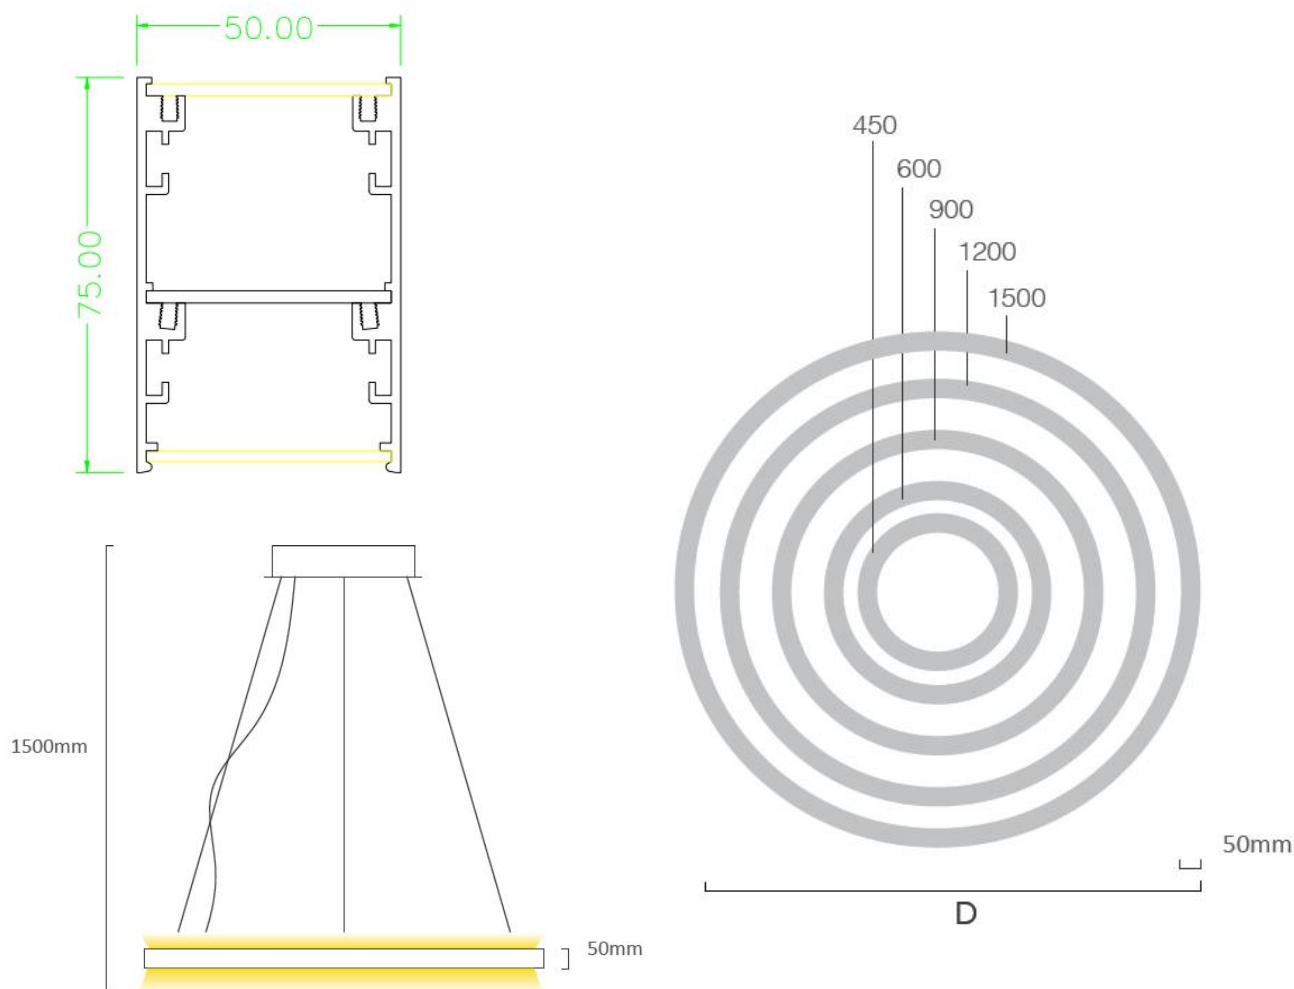

Accessories

Canopy Kit



Package:

| Item No. | Product Dimension (mm) | Qty per carton | Product N.W/pc (Kg) | N.W/ CTN (Kg) | G.W/ CTN (Kg) | Carton dimension (CM) |
|------------------|------------------------|----------------|---------------------|---------------|---------------|-------------------------|
| ORA50H45-25-9NW | Φ450mmxW50XH75mm | 1 | 4 | 4 | 5 | 51*51*10 |
| ORA50H60-35-9NW | Φ600mmxW50XH75mm | 1 | 6 | 6 | 7 | 70*70*10 |
| ORA50H90-50-9NW | Φ900mmxW50XH75mm | 1 | 8 | 8 | 9 | 99*99*10 |
| ORA50H120-70-9NW | Φ1200mmxW50XH75mm | 1 | 10 | 10 | 11 | 129*129*10 |
| ORA50H150-90-9NW | Φ1500mmxW50XH75mm | 1 | 12 | 12 | 13 | 159*159*10 |