

DAN68-15-T9 Datasheet

Features






-UGR<17, Precise lighting output no shadow.

-Flexible solution change via modular.

-High-quality housing and finish suitable for high-end hotel projects.

-IP54 available

-Honeycomb optic available, various reflector color options.




General

- Indoor
- Die-casting aluminum
- Trim recessed, cutout 68mm
- Ring color: White
- Power coated
- 355° rotatable
- 0-30° adjustable

Optic

- Lens
- Beam Angle: 15°/24°/36°/55°
- UGR<17

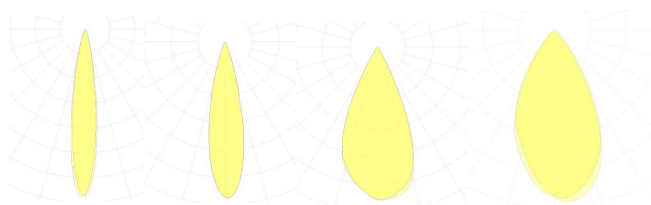

Electrical

- Class II EU
- Driver type: constant current
- Input: 220-240VAC, 50Hz
- Power: 15W
- On-off, 0-10V, Dali
- PF: 0.5

Photometric

- LED type: COB
- LED brand: Bridgelux
- SDCM <3
- CRI 90
- CCT: 2700K/3000K/4000K
- 55lm/W@15°/24°, 60lm/W@36°, 70lm/W@55°
- 825lm@15°/24°, 900lm@36°, 1050lm/W@55°

Dimension

- Net weight: 0.195kg
- Size: Φ75 x H102mm
- Cutout: 68mm

