

DG24135R-24 Datasheet

Features



- Comfortable visual UGR<13 via shielding angle>40°
- Modular design lighting source,easy to maintain.
- Uniform lighting distribution.
- High-quality housing and finish.
- Honeycomb optic available,white or black reflector color options.




General

- Indoor
- Die-casting aluminum
- Trimless recessed
- Housing color:White
- Power coated
- Reflector color: black or white option
- Modular lighting source

Optic

- Shielding angle: 40°
- Beam Angle: 10° /15° /24° /35° /50°
- UGR<13

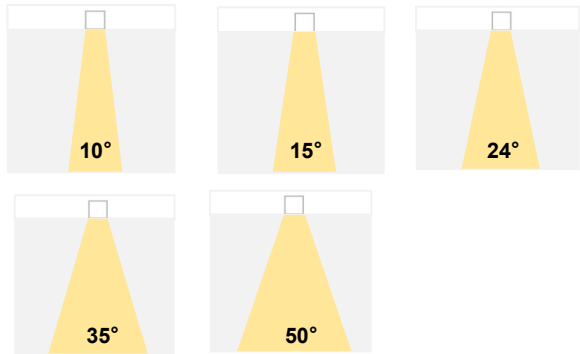

Electrical






- Class II EU
- Driver type: constant current
- Input: 220-240VAC, 50Hz
- Power: 24W
- On-off/0-10V/Dali
- PF: 0.9

Photometric

- LED brand: Bridgelux
- SDCM <3
- CRI 90
- CCT: 2700K/3000K/3500K/4000K/5000K
- Lumen@3000K, 24°
- 10° =1344lm,
- 15° =1428lm,
- 24° =1680lm,
- 35° =2016lm,
- 50° =1831lm.

DG24135R-24 Datasheet

Light distribution

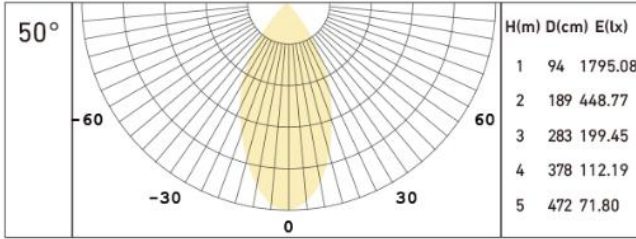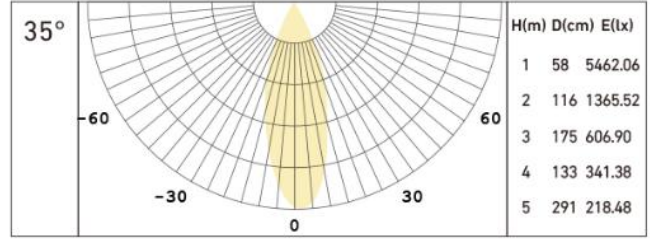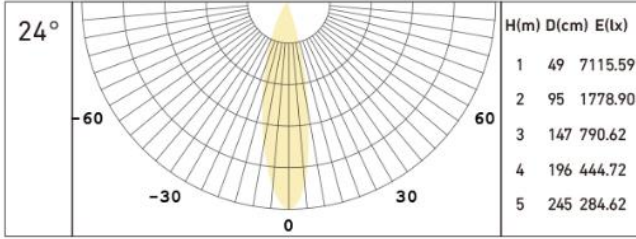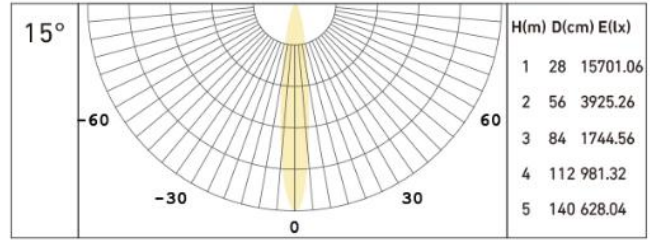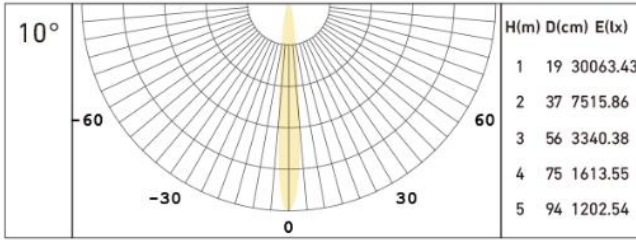

Dimension

- Size: L239*W70*H58
- Cutout: 241*35mm

