



PIO6262 Datasheet

Features



- Durable and reliable performance by superior materials. PMMA LPG.
- Various size solution, up to 150lm/W
- Ceiling clip to assure installation safety
- UGR<19 available
- 5 years warranty



General

- Indoor
- Alu frame, PMMA LPG
- Recessed
- White
- Diffuser, edge-lite

Electrical



- Class II EU
- Driver install:External,
- Driver type: constant current
- Input: 220-240VAC, 50Hz
- Dim: On-off, 0-10V, Dali, Triac
- PF: 0.9

Photometric

- LED type: SMD
- SDCM<3
- CRI 80/ CRI90
- CCT: 2700K/3000K/4000K/6500K
- 120lm/W, 150lm/W

Optic

- UGR<24, Beam Angle: 120° ,
- UGR<19, Beam Angle: 90°

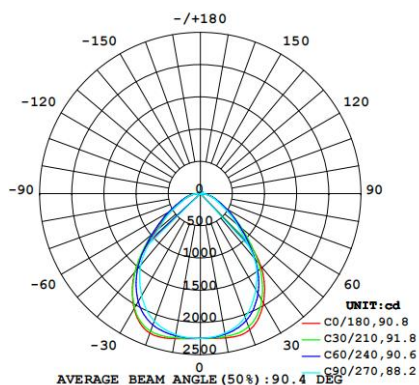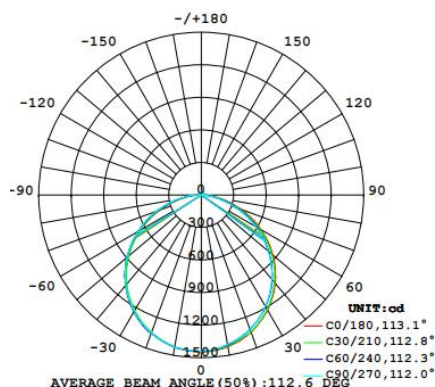

Parameters


120lm/W version

Model No.	Dimension	LGP	Watt (W)	Input Volt (Vac)	CRI	Efficiency (lm/W) @4000K	Lumen (lm)
PIO6262A-40-8XX	620x620x10mm	PMMA	36	200-240	>80	120lm/W	4320
PIO6262A-48-8XX	620x620x10mm	PMMA	48	200-240	>80	115lm/W	5520
PIO6262A-40-8XX	620x620x10mm	PMMA	36	200-240	>90	108lm/W	3888
PIO6262A-48-8XX	620x620x10mm	PMMA	48	200-240	>90	104lm/W	4968

150lm/W version

Model No.	Dimension	LGP	Watt (W)	Input Volt (Vac)	CRI	Efficiency (lm/W) @4000K	Lumen (lm)
PIO6262B-30-8XX	620x620x10mm	PMMA	30	200-240	>80	135lm/W	4050
PIO6262B-36-8XX	620x620x10mm	PMMA	36	200-240	>80	131lm/W	4698
PIO6262B-45-8XX	620x620x10mm	PMMA	45	200-240	>90	126lm/W	5670
PIO6262B-30-9XX	620x620x10mm	PMMA	30	200-240	>90	150lm/W	4500
PIO6262B-36-9XX	620x620x10mm	PMMA	36	200-240	>90	145lm/W	5220
PIO6262B-45-9XX	620x620x10mm	PMMA	45	200-240	>90	140lm/W	6300

Drawing

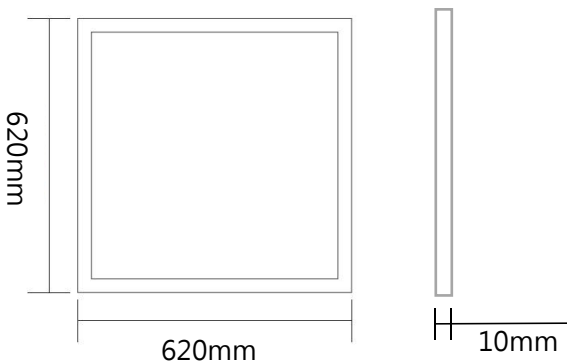

Package

Product Name	Product Description	Packing Method	PCS/CTN.	CTN.Size (cm)			Volume /CTN M ³	N.W. (KG) per CTN	G.W. (KG) per CTN
				L	W	H			
PIO6262X-XX-XX	620*620*10MM	2pcs/inner box	6	67	19	71	0.09	16.14	18.42