

MUSELED PRO 

LED CIRCULAR LIGHT SPECIFICATION


ORA30H



V1.0

ORA30H

Features:

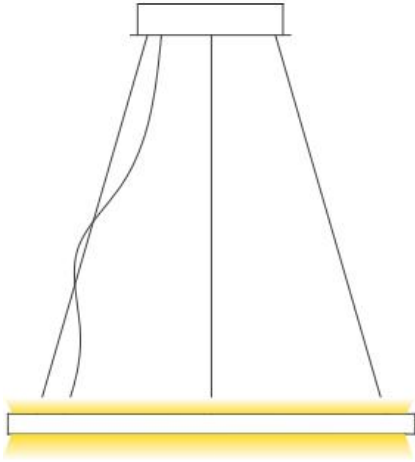

- Modern and fine design,
- Provides ambient, task, or accent lighting via up and down lighting,
- Seamless circular lighting,
- Driver is hidden via ceiling canopy kit,
- White, black, Silver color options



Inspiration:



- General or local lighting
- Residential
- Retail
- Restaurant
- Hotel


Electrical and photometric parameter:

Item No.	Dimension (mm)	Watt (W)	Voltage (VAC)	Ra	Beam Angle	CCT	Lumen (LM)
ORA30H45-25-9NW	Φ450mmxW30XH35mm	25W	200-240	>90	110°	4000K	Up:12.5W,640lm Down:12.5W,700lm
ORA30H60-35-9NW	Φ600mmxW30XH35mm	35.0W	200-240	>90	110°	4000K	Up:17.5W,900lm Down:17.5W,900lm
ORA30H90-50-9NW	Φ900mmxW30XH35mm	50.0W	200-240	>90	110°	4000K	Up:25W, 1200lm Down: 25W,1200lm
ORA30H120-70-9NW	Φ1200mmxW30XH35mm	70W	200-240	>90	110°	4000K	Up:35W, 1800lm Down: 35W,1800lm
ORA30H150-90-9NW	Φ1500mmxW30XH35mm	90W	200-240	>90	110°	4000K	Up:45W, 2300lm Down: 45W,2300lm

Remarks:

- 1.The value is typical,10% tolerance is allowed.
2. 2700K,3000K, 6000K, CCT solution is available.
- 3.Customizing diameter is supported.




Beam Angle :

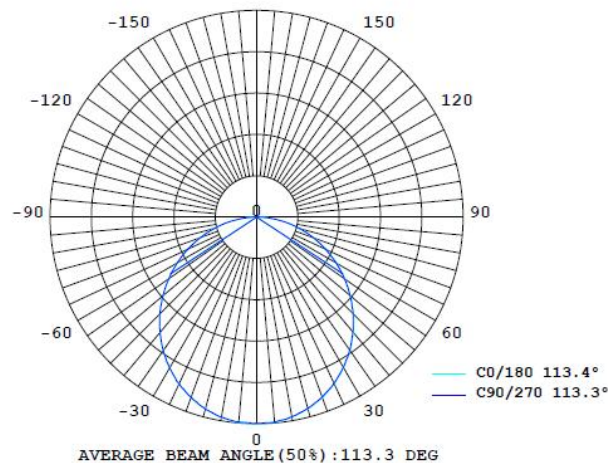

Structure specification :

Light source	Epistar chips	Finish Color	White,Black,Silver
Driver	External, Lifud/Boke	Installation	Pendant
Materials	Aluminum	Dim type	Non-dim/0-10V /Triac /Dali
Optics	Silicone	IP	IP22

Dimension

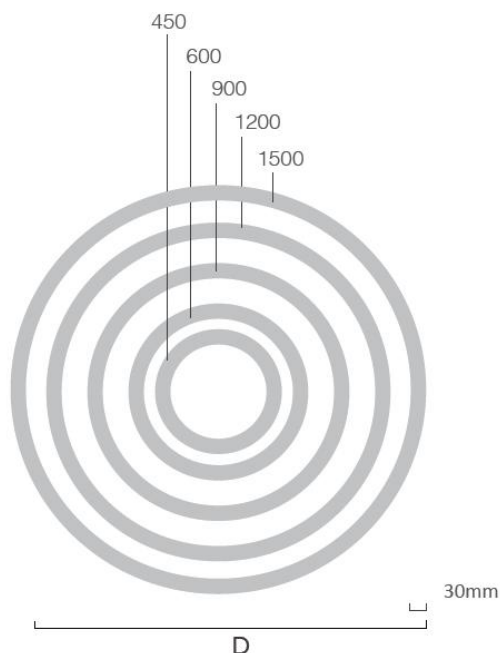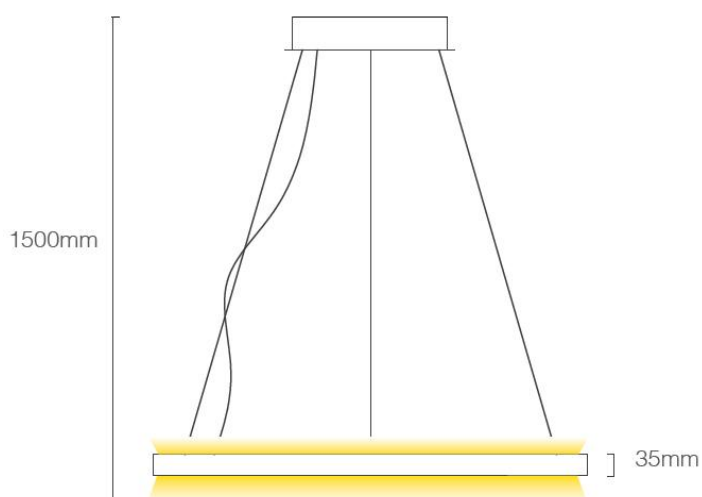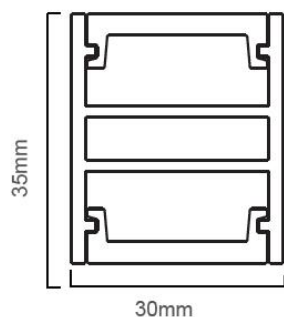

Accessories

Canopy Kit



Package:

Item No.	Product Dimension (mm)	Qty per carton	Product N.W/pc (Kg)	N.W/ CTN (Kg)	G.W/ CTN (Kg)	Carton dimension (CM)
ORA30H45-25-9NW	Φ450mmxW30XH35mm	1	3	3	4	51*51*10
ORA30H60-35-9NW	Φ600mmxW30XH35mm	1	4	4	5	70*70*10
ORA30H90-50-9NW	Φ900mmxW30XH35mm	1	6	6	7	99*99*10
ORA30H120-70-9NW	Φ1200mmxW30XH35mm	1	8	8	9	129*129*10
ORA30H150-90-9NW	Φ1500mmxW30XH35mm	1	10	10	11	159*159*10